


## TREE STUMP GRINDER



The powerful tree stump grinder removes tree stumps, stumps and rootstocks of all types of woody plants. It is widely used in garden landscaping, forestry and by local authorities. The cutting teeth are offset and can be rotated 3 times. This ensures high milling performance. A special carbide coating further extends the service life.

### All advantages at a glance

- With hydraulic swivelling device as standard
- Powerful HD piston motor
- Control via joystick or electric valve control

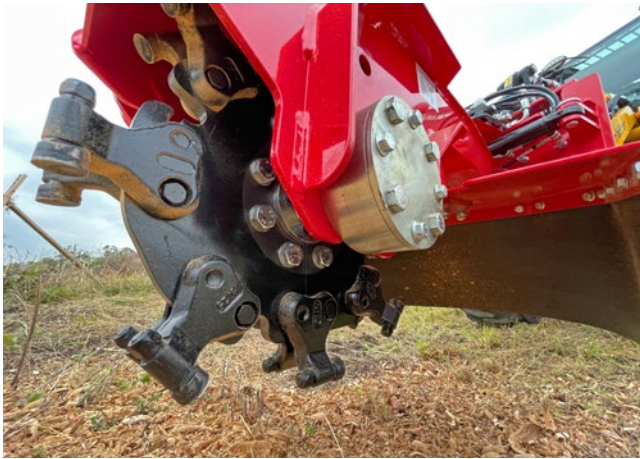

### Loader requirements

- Additional double-acting hydraulic connection
- Pressure free return
- Pressure free leakage oil line
- Hydraulic capacity > 30 l/min for type S
- Hydraulic capacity > 50 l/min for type M



### Technical data

	Type S	Type M
Oil flow	30-50 l/min	50-75 l/min oder 80-110 l/min
Max. oil pressure	250 bar	250 bar
Milling disc	370 mm Ø	470 mm Ø / 570 mm Ø
Number of tilling teeth	12 (21 mm Ø)	16 (25 mm Ø)
Dimensions (LxWxH)	810 x 690 x 580 mm	1240 x 800 x 720 mm



Watch this attachment in use:  
[schaeffer.de/88-en](http://schaeffer.de/88-en)

Type	Weight	Min. oil flow	2024	2024 SLT	2028-2	2028 SLT	23e	24e	2428-2	2428 SLT	2430	2430 SLT	2445 S	2628	2630	2630 SLT	2630 T SLT	3630	3650	3650 SLT	3650 T	3650 T SLT	4670	4670 Z	4670 T	5470 Z	5680 Z	5680 T	6680 Z	6680 T	8620 T-2	9640 T-2	9660 T-2
S	92 kg	30 l/min							□	□	■	■	■	□	□	■	■	■	■	■	■	■	□	□	□	□							
M	250 kg	50 l/min											■					■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

All major coupling options available. □ = good match ■ = perfect match