


DOUBLE-BLADE MOWER

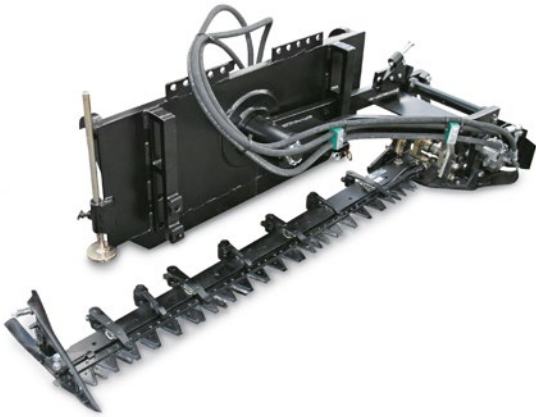

The hydraulically driven double-blade mower impresses with a perfect cutting pattern and a high area output at the same time. It cleanly cuts off blades of grass or leaves and thus also offers small creatures sufficient escape routes. Therefore, it can also be optimally used for soil-conserving applications and in organic farming. The inclination of the bar is infinitely adjustable. This means that the mower can also be used on slopes and young hedges.

All advantages at a glance

- Precise and clean cut protects the turf
- Low energy requirement
- Nature-friendly due to protection of small organisms
- Rapid regrowth
- Versatile use



Loader requirements

- Pressure free return
- Flow distributor is installed on the tool as standard, due to the low oil quantity



Watch this attachment in use:
schaeffer.de/52-en

Width	Weight	Min. oil flow	1422 / 14e	1622 / 16e	2024	2028	2028 SLT	23e / 23e T	24e / 24e T	2428	2428 SLT	2430	2430 SLT	2445 S	2628	2630	2630 SLT	2630 T SLT	3630	3650	3650 SLT	3650 T	3650 T SLT	4670	4670 T / Z	5470 Z	5680 T / Z	6680 T / Z	8620 T	9640 T	9660 T
1,50 m	195 kg	20 l/min	□	□	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□	□	□				
1,90 m	215 kg	20 l/min			□	□	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□	□

All major coupling options available. □ = good match ■ = perfect match