

DEMOLITION HAMMER



This hydraulically driven demolition hammer is ideal for breaking up masonry, concrete slabs or asphalt. The demolition hammer features a 45 mm pointed chisel as standard.

Advantages at a glance


- Robust workmanship
- Impact frequency: 750 – 2,300 impacts per minute

Loader requirements

- Depressurised return line
- Locking detent
- Double-acting connection

Options

- Pointed chisels in other sizes

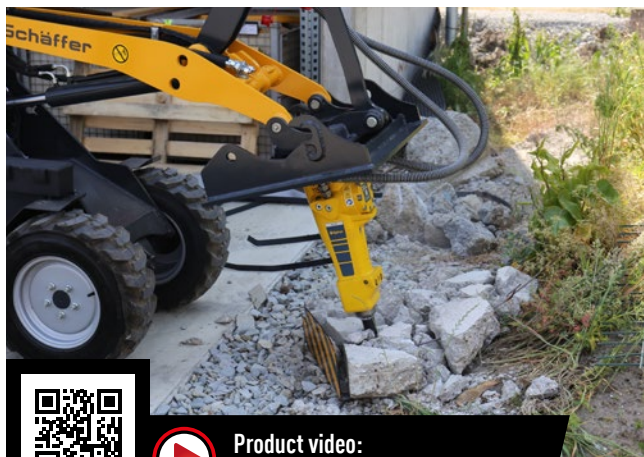

Product video:
schaeffer.de/133-en

Oil quantity	Weight	1422 / 14e	1622 / 16e	2024	2024 SLT	2028	2028 SLT	23e	23e T	24e T	24e	2428	2428 SLT	2430	2430 SLT	2445 S	2628	2630	2630 SLT	2630 T SLT	3630	3650	3650 SLT	3650 T	3650 T SLT	4670
16 – 35 l/min	120 kg	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□	□	□	□

Available with all standard holding fixtures. □ = suitable ■ = extremely suitable